


Arosa II

T Grid Lighting Solutions for



**Office, Commercial, Education
and Retail applications.**

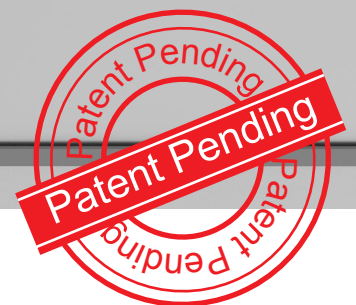

Arosa is an innovative lighting solution to work on 15mm and 24mm T grid ceiling system. While UGR is rated as low as 16 (Black reflector), it can achieve over 105lms/W. With its patent pending hanging structure, Arosa can be linked smoothly from one to another to create better ceiling image.




Arosa II

An innovative lighting product solution for T-Grid suspension ceilings.

Arosa T Grid Lighting Solution Product Options:


Arosa II-B



Arosa II-P




Arosa II-W




Standard Lens Beam Angle 90° , optional 30° and 60° .

Standard Length: 600mm and 1200mm.


Other length available by request.

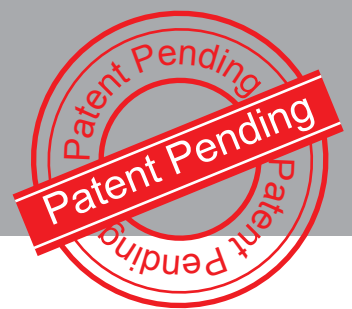


Arosa range can work with different tile edges on 15 and 24mm T bars.

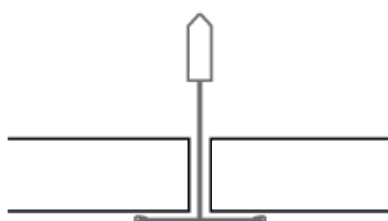


**SQUARE
EDGE**

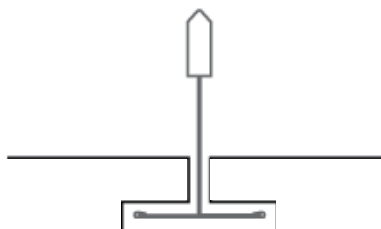

**TEGULAR
EDGE**

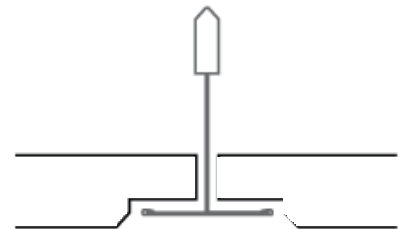

**BEVELED TEGULAR
EDGE**



Are you still considering typical LED panels, troffers and downlights when LED lighting industry is saturated?

After years of LED lighting business development, the full lighting market is flooded with LED 600x600, 600x1200 panels, troffers and round downlights. They are good, but they are just as the same as historical fluorescent lighting modules.

Victroncis is introducing an innovative, effective and refined lighting solution Lynco that creates better ceiling appearance and gives great benefits to the whole supply chain.

Key Benefits to full Supply Chain

■ Customer / Designers

- Elegant appearance of space
- Flexibility for creativeness of customers and designs
- Reduce overall project costs (materials and labours)
- Even light distribution

■ Installers / Contractors

- Simple installation procedures
- Low maintenance required
- Light weighted and easy for installation

■ Wholesaler / Distributors

- Products with unique selling points
- Reduce warehouse and logistic costs
- Long service life. Lifetime is determined by the power supply
- CC and CV version both available by request

Arosa II


An innovative lighting product solution for T-Grid suspension ceilings.

Remarkable Installation Savings


Up 60% faster installation

Over 40% material cost saving


Installation steps:

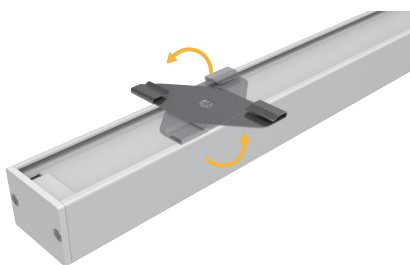

1. Move the hanger toward to the end cap as much as possible and turn the hanger vertically to the light fitting.

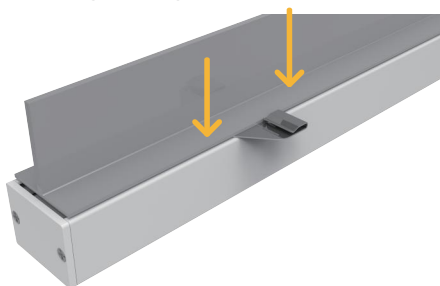


3. Place Arosa under the T bar closely.

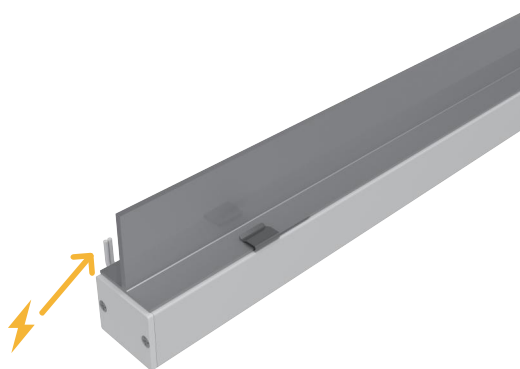

5. Place the Low Voltage cable alongside the T bar and connect to DC 48V power Supply.




7. Now the installation is completed.

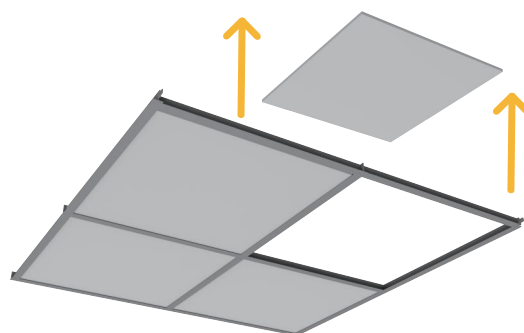

2. Remove the tiles from the T grid for easy installation.



4. Turn the hanger clockwise and lock the hanger to the T bars.

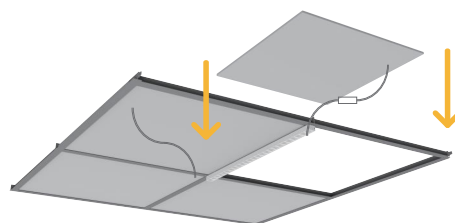

6. Place the tiles back to the ceiling.



Arosa II

An innovative lighting product solution for T-Grid suspension ceilings.

Arosa II B Size (Unit:mm)



AS06-B



AS12-B



Range	Description	Power(W)	Voltage (V)	Total Flux (lm)	Colour (K)	CRI	CC or CV	Length (mm)	Product Code
T Grid	Arosa 600mm Black Reflector	13	48	1200	3000	80	Constant Voltage	600	AS-06-B13-9M830
T Grid	Arosa 600mm Black Reflector	13	48	1280	4000	80	Constant Voltage	600	AS-06-B13-9M840
T Grid	Arosa 1200mm Black Reflector	26	48	2400	3000	80	Constant Voltage	1200	AS-12-B13-9M830
T Grid	Arosa 1200mm Black Reflector	26	48	2600	4000	80	Constant Voltage	1200	AS-12-B13-9M840

Other Colour Temperature available, please contact for details.




Arosa II

An innovative lighting product solution for T-Grid suspension ceilings.

Arosa II P Size (Unit:mm)



AS06-P



AS12-P



Range	Description	Power(W)	Voltage (V)	Total Flux (lm)	Colour (K)	CRi	CC or CV	Length (mm)	Product Code
T Grid	Arosa 600mm White Reflector	13	48	1300	3000	80	Constant Voltage	600	AS-06-P13-9M830
T Grid	Arosa 600mm White Reflector	13	48	1400	4000	80	Constant Voltage	600	AS-06-P13-9M840
T Grid	Arosa 1200mm White Reflector	26	48	2600	3000	80	Constant Voltage	1200	AS-12-P26-9M830
T Grid	Arosa 1200mm White Reflector	26	48	2800	4000	80	Constant Voltage	1200	AS-12-P26-9M840

Other Colour Temperature available, please contact for details.




Arosa II

An innovative lighting product solution for T-Grid suspension ceilings.

Arosa II W Size (Unit: mm)



AS06-W



AS12-W



Range	Description	Power(W)	Voltage (V)	Total Flux (lm)	Colour (K)	CRI	CC or CV	Length (mm)	Product Code
T Grid	Arosa 600mm Asymmetric	13	48	1150	3000	80	Constant Voltage	600	AS-06-W13-9M830
T Grid	Arosa 600mm Asymmetric	13	48	1200	4000	80	Constant Voltage	600	AS-06-W13-9M840
T Grid	Arosa 1200mm Asymmetric	26	48	2300	3000	80	Constant Voltage	1200	AS-12-W26-9M830
T Grid	Arosa 1200mm Asymmetric	26	48	2400	4000	80	Constant Voltage	1200	AS-12-W26-9M840

RGB and Other Colour Temperature available, please contact for details.





+86 755 27642829

info@victronicscn.com

www.victronicscn.com

2nd Floor A Building 3rd Industrial area
Shiyan Town Baoan District Shenzhen, China

Shenzhen Victronics Technology Co., LTD

